


SOLENOID VALVES | General Purpose

Direct Operated | 2W

G75-A | 1/8", 1/4" 2 Way NC



Brass | 1/4"

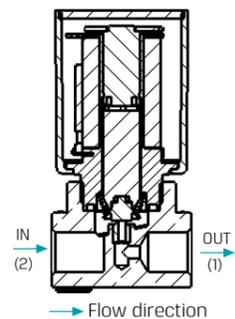

Technical Data

Function	2 Way NC
Ports size	1/8" and 1/4" BSP & NPT
Orifice size	See table
Pressure range	See table
Temperature range	Fluid : 5°C to 50°C (no freezing) Ambient : -10°C to 50°C
Materials in contact with media	Manual override: Reinforced Nylon Main Valve: Brass Solenoid Operator: Stainless Steel AISI 300 & 400 series Seals: EPDM
Coil voltage	• Voltage and power consumption - see table • All Baccara coil voltages are ± 10% of nominal
Standard protection class	IP66

• Available with brass adaptor upon request.

Max. Pressure (bar) table

Function	Orifice (mm)	AC	DC	DC Latch
2W NC	up to 2.0	12	12	12

Voltage & Power Consumption

V	AC (W) 50 Hz	DC (W)
	2	4.5
12	•	•
24	•	•
110	•	


• Available options

Voltage & Current table

Solenoid	Voltage	Inrush [A]	Holding [A]
2W 50 Hz	V +10% n-20%	0.3	0.19
2W 60 Hz		0.2	0.14
3W 50/60 Hz		0.125	0.125
DC		4.5W	

Direct Operated | 2W | G75 | 1/8", 1/4" NC

Dimensions

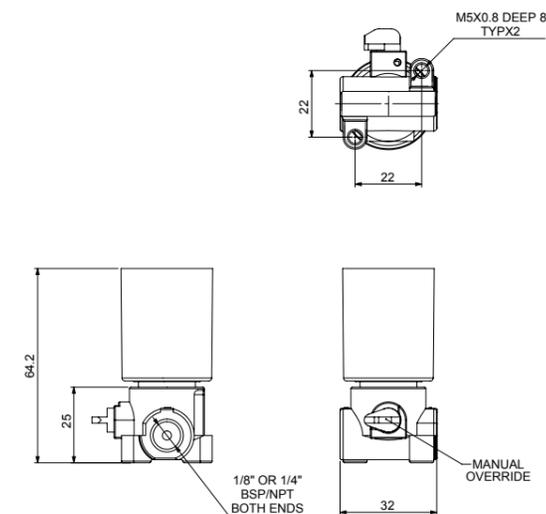

How to Order

G75-A	-	TYPE ⁽¹⁾	PORT	FUNCTION	MANUAL OVERRIDE	ORIFICE	-	VOLTAGE ⁽⁴⁾	WIRES						
		Brass	3	1/8" BSP	10	2W NC	1	None	0	1.0	1	24V AC	1	two	Null
				1/8" NPT	11			Plastic ⁽²⁾	1	1.2	2	12V AC	3	three ⁽³⁾	a
				1/4" BSP	20					1.6	3	12V DC	4		
				1/4" NPT	21					2.0	4	24V DC	5		
												23Ω	6		
												110V AC	7		
												4Ω	B		
												9Ω	C		
												12Ω	D		

Coil resistance vs input voltage range

Resistance [Ω]	Suitable input voltage range [V]
4	6 - 9
9	12 - 14
12	14 - 16
23	18 - 21

Example : G75-A-310102-1

G75 Brass, 1/8" BSP, 2W NC, no manual override, 1.2 orifice, 24V AC coil, two wires

G75-A - 3 10 1 0 2 - 1

- (1) G75-A valves are also available in plastic
- (2) Recommended for AC and continuous DC only
- (3) For Latch only
- (4) For Latch : Refer to coil resistance vs input voltage table

* To order valves manufactured according to your specific requirements, please contact our technical sales department.